



NEW PRODUCT OFFER

HF/50MHz TRANSCEIVER

IC-7800



Icom Inc.

IC-7800.

Nothing else comes close.

Icom has been the world pioneer in amateur radio for 40 years. The first to bring transistor technology, digital PLL technology and the latest DSP technology to name a few achievements. It is therefore fitting that Icom brings you the most advanced amateur radio ever in the IC-7800! No less than four 32-bit floating point DSP chips, two completely independent receivers, 7-inch wide TFT display, RTTY/PSK31 encoder and decoder and compact flash technology are but a few of the amazing features this mighty rig offers. Simply the Best, simply the ultimate in amateur radio is now a reality for you to enjoy first hand.

HF/50MHz TRANSCEIVER

IC-7800

Four 32-bit floating point DSP units
 Four independent DSP units are used. One for the transmitter, one for each receiver, and the final one for the spectrum scope. The IC-7800 builds on the phenomenal performance of the 32-bit DSP that Icom introduced to the amateur world. With the 24-bit AD/DA converter, this powerful combination supports many DSP features exclusive to the IC-7800.




+40dBm ultra high intercept point

By sparing no expense throughout the signal chain, Icom has developed an amateur rig that challenges the performance of any "Military Grade" transceiver. You'll enjoy a +40dBm* 3rd order intercept point and ultra wide dynamic range that is amateur radio's highest. The IC-7800 is the new bench mark for HF transceivers.

Examples include the use of mechanical relays instead of traditional semi-conductors and high performance DMOS mixers with a high-drive Local Oscillator. Using only two IF stages and Icom's new image rejection technology, enables the IC-7800 to clearly reproduce very weak signals as well as very strong signals without distortion.

* HF bands, pre-amp off.

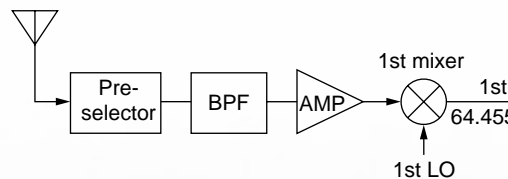

Automatic tracking pre-selector


As your first line of defense against interfering signals, the pre-selector rejects unwanted out of band interference from multi-multi operation or strong broadcast stations. The 7800's pre-selector automatically tracks the intended signal, keeping the pre-selector's bandwidth centered on the operating frequency.

Two completely independent receiver circuits

As the same "Military Grade" receiver is duplicated for the second receiver, the IC-7800 is like having two rigs in one box. Thus the ultimate in dual receiver performance is at your control; the receivers are completely independent all the way from the 4 antenna jacks, through the pre-selectors, DSP, signal detectors, front panel control, right into the stereo headphone! In addition to the separate receivers, the audio amplifiers and control circuits are duplicated for either headphones or external speakers. The true dual receiver takes your band hopping and contesting experience to the next level!

200W output power at full duty

Newly designed push-pull MOS-FET amplifiers work with 48V DC, providing a powerful 200W of output power at full duty cycle with low IMD in all bands. A low-noise switching power supply is built-in.

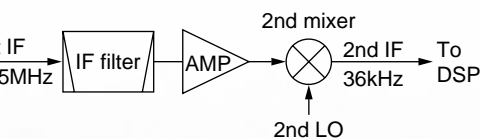

Ultra high frequency stability

Your IC-7800 will be the reference point on the band with a standard stability of $\pm 0.05\text{ppm}$! Even on 6m band, that is less than 3Hz error from the Oven Controlled Crystal Oscillator! Also, a 10MHz reference frequency can be input/output for external equipment.

7-inch wide color TFT LCD

The large 7-inch wide (800x480 pixels) color display has to be seen to be believed! High linearity needle S-meters, multi-function spectrum scope and RTTY/PSK31 messages are displayed in vivid color. In addition, the IC-7800 has a VGA connector allowing you to connect an external monitor.

Multi function spectrum scope

With the dedicated DSP unit, the spectrum scope offers linearity, accuracy and resolution. By adjusting the scope selectivity (resolution band width), the spectrum scope allows you to find those weak signals right next to strong ones! With this ground breaking scope, you can even monitor the distortion or width of the received signals. In addition, the scope range can be set independently from the receiving frequency. You can monitor the band condition between the selected sweep edges, as well as sweep a selected band width centered on the receiving frequency in the scope screen.



Example of fixed spectrum scope range. The receiving frequency (red line) moves within the set sweep range.



Example of spectrum scope centered on the receiving frequency. Sweep range follows the receiving frequency.

RTTY /PSK31 operation without PC connection

The IC-7800 has a modulator and demodulator for the 2 major HF Amateur digital modes. It is possible to encode and decode PSK31 as well as baudot RTTY signals by simply connecting a USB keyboard to the IC-7800. You no longer need to connect a PC for RTTY/PSK31 operation. In addition, transmitted and received messages can be stored to the CF card memory and transferred to your PC.



IF notch filter with adjustable notch filter characteristics

The IC-7800's DSP controlled manual notch filter shape can be set in 3-steps for the various receiving conditions. Use a soft filter shape for tuning an interfered tone, then switch to the sharp one to cut 70dB off the tone.

Professional 6m receiver

While most HF/50MHz transceivers share the pre-amp between the HF bands and 50MHz band, the IC-7800 uses an exclusive preamp and mixer especially for 50MHz. This preamp and mixer are tuned to the 50MHz band and improve cross modulation characteristics, particularly important when picking up a very weak signal near a strong station.

Digital Voice Recorder

The Digital Voice Recorder (DVR) is a convenient function for contests, DX peditions, field day and even normal operation. Record your call sign, CQ, or other station information into a memory. Independent "Rec" and "Play" buttons are on the front panel.

CF (Compact Flash) memory card

An IC-7800 has a CF card slot and a CF card will be supplied with the IC-7800. You can store your various settings such as filter, display, mic equalizer, etc, on your card. When sharing the IC-7800 with multi-users such as on a DX pedition, in a contest or as a club rig, the CF card allows you to restore your personal settings instantly.



And more....

- Soft and sharp IF filter shapes for receiver
- Synchronous AM detection
- Reverse power protection circuit built-in
- RS-232C port for PC connection
- BNC type RF accessory connectors
- Audio Peak filter for CW
- Multi-function noise blander
- Advanced noise reduction and auto notch
- Twin peak audio filter and tuning indicator for RTTY
- High speed automatic antenna tuner
- Built-in Voice synthesizer
- Main/Sub receiver connectors
- Optional IC-PW1 1kW Linear Amplifier available



SPECIFICATIONS

GENERAL

- Frequency coverage (unit: MHz) :
 - Receive 0.030–60.000*
 - Transmit 1.800–1.999 3.500–3.999
 - 7.000–7.300 10.100–10.150
 - 14.000–14.350 18.068–18.168
 - 21.000–21.450 24.890–24.990
 - 28.000–29.700 50.000–54.000
- * Some frequency ranges are not guaranteed.
- Mode : USB, LSB, CW, RTTY, AM, FM, PSK31
- Number of memory channels : 101 (99 regular and 2 scan edges)
- Antenna impedance : 50Ω unbalanced (with antenna tuner OFF)
- Antenna connector : SO-239x4
- Temperature range : 0°C to +50°C; +32°F to +122°F
- Frequency stability : Less than ±0.05ppm (0°C to +50°C)
- Frequency resolution : 1Hz
- Power supply requirement : 85–265V AC
- Power consumption : Tx Max. power 800VA
- Rx Standby 200VA typ.
- Max. audio 210VA typ.
- Dimensions (W×H×D) : 424 × 150 × 420 mm;
- (projections not included) 16¹¹/₁₆ × 5²⁹/₃₂ × 16¹⁷/₃₂ in
- Weight (approx.) : 23kg; 50.7lb

TRANSMITTER

- Output power (continuously adjustable):
 - SSB, CW, FM, RTTY, PSK31 5–200W
 - AM 5–50W
- Modulation system : SSB DPSN modulation
- AM Low power modulation
- FM Phase modulation
- Spurious emission : Less than –60dB
- Carrier suppression : More than 60dB
- Unwanted sideband suppression : More than 80dB
- Microphone connector : 8-pin connector (600Ω)

RECEIVER

- Receive system : Double conversion superheterodyne
- Intermediate frequencies : 1st 64.455MHz
- 2nd 36kHz
- Sensitivity (typical) :
 - SSB, CW, RTTY (BW: 2.4kHz) 0.1–1.79 0.5μV*¹
 - (10dB S/N) 1.8–29.99 0.16μV*¹
 - 50.0–54.0 0.13μV*²
 - AM (BW: 6kHz) 0.1–29.99 2μV*¹
 - (10dB S/N) 50.0–54.0 1μV*²
 - FM (BW: 15kHz) 28.0–29.99 0.5μV*¹
 - (12dB SINAD) 50.0–54.0 0.32μV*²
- *1 Preamp-1 is ON, *2 Preamp-2 is ON
- Squelch sensitivity (Pre-amp: OFF) :
 - SSB, CW, RTTY, PSK31 Less than 5.6μV
 - FM Less than 1μV
- Selectivity (representative value) :
 - SSB, RTTY (BW: 2.4kHz) More than 2.4kHz/–3dB
 - Less than 3.6kHz/–60dB
 - CW (BW: 500Hz) More than 500Hz/–3dB
 - Less than 700Hz/–60dB
 - AM (BW: 6kHz) More than 6.0kHz/–3dB
 - Less than 15.0kHz/–60dB
 - FM (BW: 15kHz) More than 12.0kHz/–6dB
 - Less than 20.0kHz/–60dB
- Spurious and image rejection ratio : More than 70dB (except 50MHz IF through point)
- AF output power : More than 2.6W at 10% distortion with an 8Ω load
- RIT variable range : ±9.999kHz
- PHONES connector : 3-conductor 6.35 (d) mm (1/4")
- External speaker connectors : 2-conductor 3.5 (d) mm (1/8")/8Ω

ANTENNA TUNER

- Matching impedance range :
 - HF bands 16.7–150Ω unbalanced (Less than VSWR 3:1)
 - 50MHz band 20–125Ω unbalanced (Less than VSWR 2.5:1)
- Min. operating input power : 8W
- Tuning accuracy : VSWR 1.5:1 or less
- Insertion loss : Less than 1.0dB (after tuning)

REAR VIEW



This device has not been approved by the appropriate authorities in each country. This device may not be sold or leased, or be offered for sale or lease, until approval has been obtained. All stated features, appearances, screen shots and specifications may be subject to change without notice. All screens show simulated pictures.

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone: (425) 454-7619

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL : <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553
URL : <http://www.bjicom.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom France S.a

Zac de la Plaine, 1, Rue Brindejonn des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: (33) 5 61 36 03 03 Fax: (33) 5 61 36 03 00
URL : <http://www.icom-france.com>



Certificate Number Q14190
Icom Inc. (Japan), is an ISO9001
certification acquired company.

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Icom Spain S.L.

Crta. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL : <http://www.asia-icom.com>